



Oak Flooring

INSPIRED BY NATURE, CRAFTED BY PASSION

everOak

YOUR FLOOR, YOUR STYLE



At everOak we endeavour to walk our customers through every process involved in choosing, fitting and maintaining oak flooring. From flooring construction to developing new bespoke floor finishes, our team will always go the extra mile to ensure you receive the timber flooring and finish you desire.

With years of experience in selling high quality engineered oak flooring to the trade and retail market, we believe our floors are second to none. Strict supplier screening, quality checks and our expert production team ensure our customers receive only the best in luxury oak floors.

Our skilled craftsmen have a wealth of experience of fitting, both solid and engineered oak flooring, in projects all over the Australia. Each project is unique and having one point of contact for both the supply and floor fitting aspects of your order removes the amount of back and forth communications, making your ordering process smoother.

NOTES

CONTENTS



14mm - Oak Flooring ————— 3



15mm - Oak Flooring ————— 5



20mm - Oak Flooring ————— 7



Herringbone - Oak Flooring ————— 9



Chevron - Oak Flooring ————— 11



Maintenance, Facts, and Warranty — 13



Cream White Light Tan Vintage Natural Honey Brown Misty Grey Noble Grey

14021	14022	14023	14024	14025	14026
Brushed Lacquer Surface	Brushed Lacquer Surface	Brushed Lacquer Surface	Brushed Lacquer Surface	Brushed Lacquer Surface	Brushed Lacquer Surface



Oak Latte Classic Oak Walnut Lime Wash Black Forest Crayon

14028	14029	14030	14031	14032	14033
Brushed Lacquer Surface	Brushed Lacquer Surface	Brushed Lacquer Surface	Brushed Lacquer Surface	Brushed Lacquer Surface	Brushed Lacquer Surface

TECHNICAL SPECIFICATION

Timber Grade		ABCD
Dimension	Length	1900 mm
	Width	190 mm
	Thickness	14 mm
	Top Layer	2 mm
Bevel		4-Sided Micro Bevel Edges
Joining System		Tongue and Groove
Supplied	Box Size	2.888 m ² / 8 Panels
	Nesting	< 25% Random Short boards
Installation	Direct Stick	Yes
	Floating	Yes
Moisture Content		8-12%
Warranty - Wear	Domestic	20 Years
	Commercial	3 Years (By Request)



14023

Vintage Natural



15mm - OAK FLOORING



Natural Limed	Oak Ebony	Raw Neutral	Smoked Brown	Beige Ash
1002 Brushed Lacquer Surface	1022 Brushed Lacquer Surface	1043 Brushed Lacquer Surface	1048 Brushed Lacquer Surface	1049 Brushed Lacquer Surface



Coral Sand	Moss Grey	Oak Natural	Oak Blanc	Oak Pure
1051 Brushed Lacquer Surface	1062 Brushed Lacquer Surface	3001 Brushed Lacquer Surface	3003 Brushed Lacquer Surface	3005 Brushed Lacquer Surface

TECHNICAL SPECIFICATION		
Dimension	Timber Grade	ABCD
	Length	1900 mm
	Width	190 mm
	Thickness	15 mm
Bevel	Top Layer	3 mm
	Bevel	4-Sided Micro Bevel Edges
Joining System		Tongue and Groove
Supplied	Box Size	2.888 m² / 8 Panels
	Nesting	< 25% Random Short boards
Installation	Direct Stick	Yes
	Floating	Yes
Moisture Content		8-12%
Warranty - Wear	Domestic	20 Years
	Commercial	3 Years (By Request)



Natural Limed

1002
Brushed Lacquer
Surface



Raw Neutral

1043
Brushed Lacquer
Surface



Smoked Brown

1048
Brushed Lacquer
Surface



Beige Ash

1049
Brushed Lacquer
Surface



Coral Sand

1051
Brushed Lacquer
Surface



Light Latte

1059
Brushed Lacquer
Surface



Moss Grey

1062
Brushed Lacquer
Surface



Oak Blanc

3003
Brushed Lacquer
Surface

TECHNICAL
SPECIFICATION

Timber Grade		ABCD
Dimension	Length	2200 mm
	Width	220 mm
	Thickness	20 mm
	Top Layer	6 mm
Bevel		4-Sided Micro Bevel Edges
Joining System		Tongue and Groove
Supplied	Box Size	1.936m ² / 4 Panels
	Nesting	< 25% Random Short boards
Installation	Direct Stick	Yes
	Floating	Yes
Moisture Content		8-12%
Warranty - Wear	Domestic	20 Years
	Commercial	3 Years (By Request)




1048
Smoked Brown





1049
Beige Ash

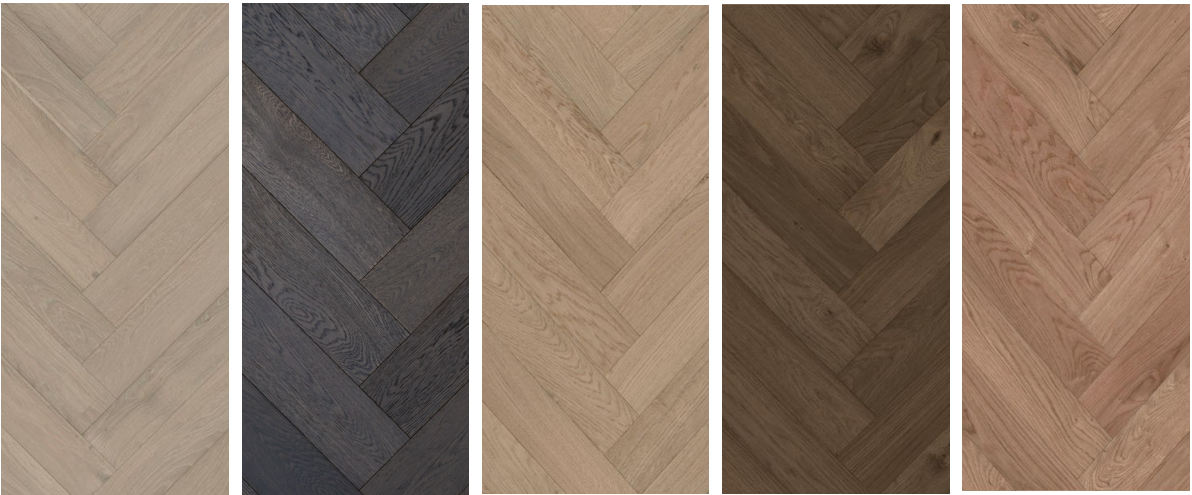

Natural Lined	Oak Ebony	Raw Neutral	Smoked Brown	Beige Ash
1002 Brushed Lacquer Surface	1022 Brushed Lacquer Surface	1043 Brushed Lacquer Surface	1048 Brushed Lacquer Surface	1049 Brushed Lacquer Surface



Coral Sand	Moss Grey	Oak Natural	Oak Blanc	Oak Pure
1051 Brushed Lacquer Surface	1062 Brushed Lacquer Surface	3001 Brushed Lacquer Surface	3003 Brushed Lacquer Surface	3005 Brushed Lacquer Surface

TECHNICAL
SPECIFICATION

Timber Grade		ABC
Dimension	Length	600 mm
	Width	120 mm
	Thickness	15 mm
	Top Layer	3 mm
Bevel		4-Sided Micro Bevel Edges
Joining System		Tongue and Groove
Supplied	Box Size	1.152m² / 16 Panels
	Nesting	0% Random Short boards
Installation	Direct Stick	Yes
	Floating	No
Moisture Content		8-12%
Warranty - Wear	Domestic	20 Years
	Commercial	3 Years (By Request)





Natural Limed

1002
Brushed Lacquer
Surface



Raw Neutral

1043
Brushed Lacquer
Surface



Smoked Brown

1048
Brushed Lacquer
Surface



Beige Ash

1049
Brushed Lacquer
Surface



Coral Sand

1051
Brushed Lacquer
Surface



Moss Grey

1062
Brushed Lacquer
Surface

TECHNICAL
SPECIFICATION

Timber Grade		ABC
Dimension	Length	770 mm
	Width	125 mm
	Thickness	15 mm
	Top Layer	3 mm
Bevel		4-Sided Micro Bevel Edges
Joining System		Tongue and Groove
Supplied	Box Size	1.54m² / 16 Panels
	Nesting	0% Random Short boards
Installation	Direct Stick	Yes
	Floating	No
Moisture Content		8-12%
Warranty - Wear	Domestic	20 Years
	Commercial	3 Years (By Request)



1062
Moss Grey





14025

Misty Grey



MAINTENANCE GUIDE

To avoid scratches, apply felt pads to your furniture legs and use only soft rubber casters. Protect high traffic areas with runners and area rugs.

Do not use a wet spray microfiber mop. Use a well rung out damp cloth to clean up any dirt and footprints, but avoid using excessive moisture. All spills should be cleaned up immediately. Never use wax, polish or scouring agents as they may dull or distort the finish. You can use acetone or a cleaner specially formulated for oak floors to remove stubborn marks.

VARIATIONS AND FLOORING FACTS

Everoak Flooring Products are made from natural materials. Individual pieces and batches may vary in colour, texture and naturally occurring features.

Reproduction in printing and photography are for guidance only. These give an indication of colour and are not necessarily representative of the overall effect or design.

When making your selection, please take care when selecting from a single sample, as this is only an indication.

In all jobs, the flooring products supplied will contain variation from board to board and job to job, and from the samples on display. The colour of your flooring may change over time with exposure to UV light.

Each flooring product continues to take up and release moisture during its life, depending on local conditions, environmental conditions and weather changes. Being aware of this and checking conditions is important before installation.

For a lasting floor product, it is essential to install your floating floor in accordance with Everoak’s guidelines. Please read installation guides before proceeding with your flooring installation.

WARRANTY

Everoak Flooring Engineered Oak Flooring is subject to 20-year residential (domestic) wear warranty, 3-year commercial warranty (by request) and lifetime structural warranty.

Our products are guaranteed to be delivered free from defects in material and workmanship and are warranted in their original manufactured condition. Gloss reduction and scratches caused by regular traffic are not covered by warranty. Please contact our sales representative to view full warranty wording, terms and conditions.



everOak

YOUR FLOOR, YOUR STYLE



www.everoakfloors.com

02 8668 5668 | info@everoakfloors.com

13/69 O'Riordan St Alexandria NSW 2015